

HYTORC JGUN PNEUMATIC TORQUE WRENCH

The jGun series of pneumatic torque wrenches covers a torque range of 81 – 10,705 Nm, making it suitable for a wide variety of applications. Pneumatic torque wrenches should be used with an FRL pressure regulator.

JGUN DIGITAL

The HYTORC jGun DIGITAL is a pistol-grip pneumatic torque wrench equipped with a digital numerical display. Its operation does not require an external pressure regulation unit. The airflow control knob on the handle allows the user to set the desired torque value, which is directly displayed on the digital screen. The digital display shows the exact torque value based on the air pressure set for the wrench. An optional screen protector is also available, allowing the jGun DIGITAL to be used in all weather conditions.




JGUN DIGITAL 6.5

The DJ-6.5 model, specifically designed for tower crane assembly, features a narrow gearbox, allowing for smooth operation in tight spaces. Despite the narrower design, the DJ-6.5 model can still achieve a maximum torque of slightly over 8,800 Nm.



MODELS AND DIMENSIONS

Item	Torque range Nm	Drive	H mm	D mm	L mm	W mm	Weight kg	Free speed rpm
JGUN-D.25	81 - 339	3/4"	200	64	201	80	3,8	65
JGUN-D.5	251 - 678	3/4"	200	66	227	80	4,0	24
JGUN-D1	475 - 1 592	3/4"	200	66	247	80	4,5	6,5
JGUN-D2	780 - 2 832	1"	214	83	302	86	7,5	5,5
JGUN-D3	1 161 - 4 309	1"	214	83	319	86	8,1	5
JGUN-D5	1 891 - 6 843	1 1/2"	221	105	357	86	12,9	2,5
JGUN-D6.5	3 118 - 8 813	1 1/2"	219	101	370	86	10,0	2,4
JGUN-D8	3 118 - 10 705	1 1/2"	227	116	384	86	17,5	1,5

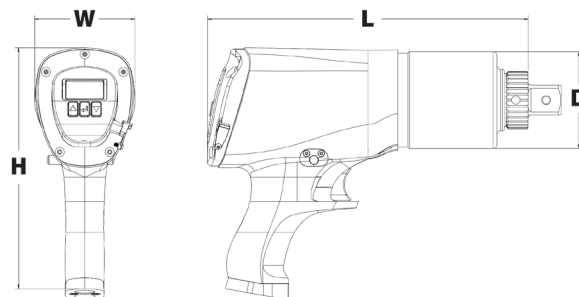

JGUN DIGITAL